



Codice	950000
EAN code	8032706070614
HS code	84137045



DESCRIZIONE

Pompa a pre-carica con girante ad anello liquido, ideale per il travaso di liquidi puliti, non viscosi, acidi e alcalini, con temperatura di travaso non superiore ai 35°C. Azionamento a trapano.


IDONEA AL TRAVASO DI:

Acqua, vino, latte, succhi di frutta, aceto ecc.

POMPA

Portata L/h	1500
Diam. portagomma	20 mm
Filetto portagomma	3/4" F
Temperatura max °C	35° C
pH	3 : 11
Viscosità CPS max	3
Pressione di esercizio	0,1 bar - 1,5 psi
H pescaggio (a tubo vuoto)	1 mt
L mandata max con H0	2 mt
Tenuta albero	NBR
Materiale corpo pompa	Lega CuZn Low Lead + Novax
Materiale retro corpo	Tecnopolimero
Componente rotante	Girante
Certificazioni	CE + Moca

Misure	70 x 100 x h. 120	Peso netto (Kg)	0,9
Imballo	70 x 170 x h. 190	Peso lordo (Kg)	1,0

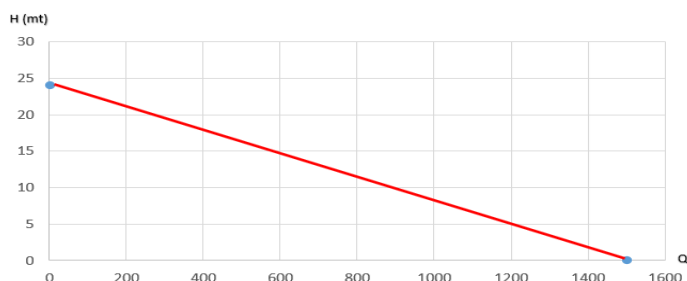

60335-1 / 60335-2 (2008-07), B.T. 2006/95/CEE (2006-12), 73/23 CEE (1973-02), 98/37/CEE (1998-06), 2006/42/CE (2006-05), in 93/68/CEE (1993-07), 2000/14/CE (2000-05), 2014/30/ec (2014-02)

MOTORE

Voltaggio (V)	-
Potenza (HP)	-
Potenza (kW)	-
A	-
Frequenza (Hz)	-
Velocità di rotazione (RPM)	2000 min-2850 max
Grado di protezione	-
Protezione termica	-
Senso di rotazione	Dx / sx (bisenso)
Albero	Inox AISI 316
Collegamento elettrico	-
Rumorosità (dB)	69
Modalità d'uso	Continua

CONSIGLIO D'USO : Nel caso d'uso con prevalenza verticale, si consiglia di installare una valvola di fondo con relativo filtro all'inizio del tubo di aspirazione per impedire alla pompa di svuotarsi allo spegnimento. Per pulizia e manutenzione si rimanda a quanto indicato dal costruttore nel libretto di uso e manutenzione in dotazione.

RICAMBI E ACCESSORI

Descrizione	Codice	Q. tà
Girante con albero	950004	1
Kit portagomma dritto Novax	750035	1

NOVAX DRILL 20

TECHNICAL SHEET



Code	950000
EAN code	8032706070614
HS code	84137045



SPECIFICATIONS:

Pre-charged pump with liquid ring impeller, ideal for transferring clean, non-viscous, acidic or alkaline liquids with transfer temperature not exceeding 35°C.
Drill-driven pump.


IT IS SUITABLE FOR TRANSFERRING:

Water, wine, milk, fruit juices, vinegar, etc.

PUMP

Flow rate (l/h)	1500
Hose connection (Ø)	20 mm
Fitting thread	3/4" F
Max. temperature	35°C / 95°F
pH	3 : 11
Max. viscosity (CPS)	3
Operating pressure	0,1 bar - 1,5 psi
Max. suction depth	1 mt
Max. discharge length (H0)	2 mt
Shaft seal	NBR
Body pump material	CuZn Low Lead + Novax alloy
Cover material	Technopolymer
Rotating component	Impeller
Certificates	CE + Moca

Measures	70x100xh. 120	Net weight (Kg)	0,9
Box	70x170xh. 190	Gross weight (Kg)	1,0

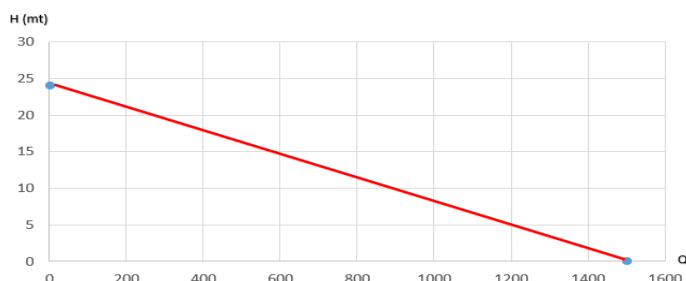

60335-1 / 60335-2 (2008-07), B.T. 2006/95/CEE (2006-12), 73/23 CEE (1973-02), 98/37/CEE (1998-06), 2006/42/CE (2006-05), in 93/68/CEE (1993-07), 2000/14/CE (2000-05), 2014/30/EC (2014-02)

ELECTRIC MOTOR

Voltage (V)	-
Power rating (HP)	-
Power rating (kW)	-
A	-
Frequency (Hz)	-
Rotation speed (RPM)	2000 min-2850 max
Protection	-
Over load protection	-
Direction of rotation	Bi-directional rotation
Main shaft	Inox AISI 316
Electrical connection	-
Noise level (dB)	69
Operating mode	Continuous duty

USAGE RECOMMENDATIONS:

For vertical head applications, install a foot valve with strainer on the suction line to prevent pump draining when switched off.
Refer to the manufacturer's operation and maintenance manual for cleaning and servicing.

SPARE PARTS & ACCESSORIES

Description	Code	Pcs
Impeller with shaft	950004	1
Right fitting + fly nut (Novax)	750035	1

Description	Code	Pcs