

# MARINA MINI NOVAX 20-12V - PC



Codice	670000 PC
EAN code	8032706073790
HS code	84137045




DESCRIZIONE
Pompa a pre-carica con girante ad anello liquido, ideale per il travaso di liquidi puliti, non viscosi, acidi e alcalini con temperatura di travaso non superiore ai 35°C. Uso occasionale ed intermittente. Alimentazione 12V.

IDONEA AL TRAVASO DI:
Acqua, vino, latte, succhi di frutta, aceto ecc.

POMPA	
Portata L/h	2300
Diam. portagomma	20 mm
Filetto portagomma	3/4" F
Temperatura max °C	35° C
pH	3 : 11
Viscosità CPS max	3
Pressione di esercizio	0,2 bar - 2,2 psi
H pescaggio (a tubo vuoto)	1,5 mt
L mandata max con H0	2,5 mt
Tenuta albero	NBR
Materiale corpo pompa	Lega CuZn Low Lead + Novax
Materiale retro corpo	Tecnopolimero
Componente rotante	Girante
Certificazioni	CE + Moca

MOTORE	
Voltaggio (V)	12V
Potenza (HP)	0,4
Potenza (kW)	0,3
A	10
Frequenza (Hz)	-
Velocità di rotazione (RPM)	2980
Grado di protezione	IP X4
Protezione termica	-
Senso di rotazione	Dx / sx (bisenso)
Albero	Inox AISI 316
Collegamento elettrico	Cavi per batteria
Rumorosità (dB)	66
Modalità d'uso	Intermittente (max 20 min)

Misure	100 x 200 x h. 200	Peso netto (Kg)	3,7
Imballo	155 x 290 x h. 210	Peso lordo (Kg)	4,2

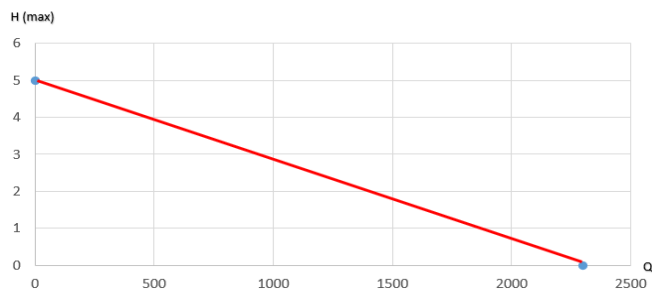

60335-1 / 60335-2 (2008-07), B.T. 2006/95/CEE (2006-12), 73/23 CEE (1973-02), 98/37/CEE (1998-06), 2006/42/CE (2006-05), in 93/68/CEE (1993-07), 2000/14/CE (2000-05), 2014/30/ec (2014-02)

**CONSIGLIO D'USO:** Nel caso d'uso con prevalenza verticale, si consiglia di installare una valvola di fondo con relativo filtro all'inizio del tubo di aspirazione per impedire alla pompa di svuotarsi allo spegnimento.  
Per pulizia e manutenzione si rimanda a quanto indicato dal costruttore nel libretto di uso e manutenzione in dotazione.

## RICAMBI E ACCESSORI

Descrizione	Codice	Q. tà
Kit girante	550035	1
Kit guarnizioni	991035	1
Kit corpo pompa	992035	1
Kit portagomma dritto Novax	750035	1
Kit portagomma curvo Novax	810035	1
Filtro aspirazione 20mm	004201	1

Descrizione	Codice	Q. tà


# MARINA MINI NOVAX 20-12V - PC



Code	670000 PC
EAN code	8032706073790
HS code	84137045



Measures	100x200xh. 200	Net weight (Kg)	3,7
Box	155x290xh. 210	Gross weight (Kg)	4,2

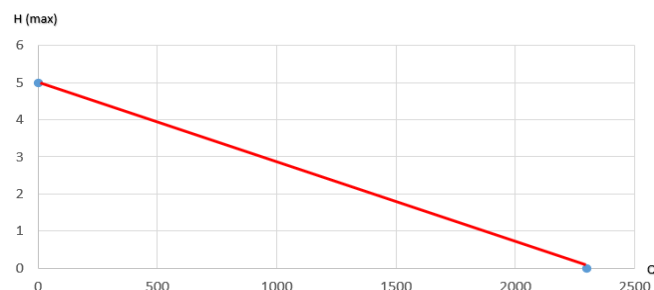

60335-1 / 60335-2 (2008-07), B.T. 2006/95/CEE (2006-12), 73/23 CEE (1973-02), 98/37/CEE (1998-06), 2006/42/CE (2006-05), in 93/68/CEE (1993-07), 2000/14/CE (2000-05), 2014/30/EC (2014-02)

## SPECIFICATIONS:

Pre-charged pump with liquid ring impeller, ideal for transferring clean, non-viscous, acidic and alkaline liquids with transfer temperature not exceeding 35°C. For occasional and intermittent use. 12V power supplied.

## IT IS SUITABLE FOR TRANSFERRING:

Water, wine, milk, fruit juices, vinegar, etc.

## PUMP

Flow rate (l/h)	2300
Hose connection (Ø)	20 mm
Fitting thread	3/4" F
Max. temperature	35°C / 95°F
pH	3 : 11
Max. viscosity (CPS)	3
Operating pressure	0,2 bar - 2,2 psi
Max. suction depth	1,5 mt
Max. discharge length (H0)	2,5 mt
Shaft seal	NBR
Body pump material	CuZn Low Lead + Novax alloy
Cover material	Technopolymer
Rotating component	Impeller
Certificates	CE + Moca

## ELECTRIC MOTOR

Voltage (V)	12V
Power rating (HP)	0,4
Power rating (kW)	0,3
A	10
Frequency (Hz)	-
Rotation speed (RPM)	2980
Protection	IP X4
Over load protection	-
Direction of rotation	Bi-directional rotation
Main shaft	Inox AISI 316
Electrical connection	Jump leads
Noise level (dB)	66
Operating mode	Intermittent (max. 20 min)

## USAGE RECOMMENDATIONS:

For vertical head applications, install a foot valve with strainer on the suction line to prevent pump draining when switched off. Refer to the manufacturer's operation and maintenance manual for cleaning and servicing.

## SPARE PARTS & ACCESSORIES

Description	Code	Pcs
Impeller kit	550035	1
Seals & gasket kit	991035	1
Pump body kit	992035	1
Right fitting + fly nut (Novax)	750035	1
Bent fitting + fly nut (Novax)	810035	1
Suction filter 20mm	004201	1

Description	Code	Pcs