

NOVAX G-20 0,8HP

SCHEDA TECNICA



Codice	971000 I
EAN code	8032706072380
HS code	84137045



DESCRIZIONE

Pompa a pre-carica ad ingranaggi, ideale per il travaso di liquidi viscosi puliti, acidi e alcalini, anche alimentari, con temperatura di travaso non superiore ai 35°C, anche in presenza di bolle d'aria.


IDONEA AL TRAVASO DI:

Olio d'oliva e alimentari in generale

POMPA

Portata L/h	1750
Diam. portagomma	20 mm
Filetto portagomma	3/4" F
Temperatura max °C	35° C
pH	3 : 11
Viscosità CPS max	500
Pressione di esercizio	0,4 bar - 5,8 psi
H pescaggio (a tubo vuoto)	2 mt
L mandata max con H0	4 mt
Tenuta albero	NBR
Materiale corpo pompa	Lega CuZn Low Lead + Novax
Materiale retro corpo	Lega CuZn Low Lead + Novax
Componente rotante	Ingranaggi inox
Certificazioni	CE + Moca

Misure	120 x 230 x h. 190	Peso netto (Kg)	5,8
Imballo	155 x 290 x h. 210	Peso lordo (Kg)	6,3

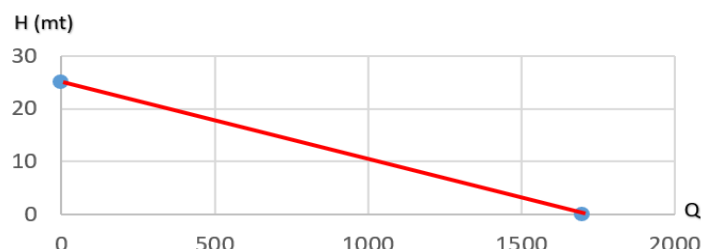

60335-1 / 60335-2 (2008-07), B.T. 2006/95/CEE (2006-12), 73/23 CEE (1973-02), 98/37/CEE (1998-06), 2006/42/CE (2006-05), in 93/68/CEE (1993-07), 2000/14/CE (2000-05), 2014/30/EC (2014-02)

MOTORE

Voltaggio (V)	230
Potenza (HP)	0,8
Potenza (kW)	0,56
A	2
Frequenza (Hz)	50
Velocità di rotazione (RPM)	2850
Grado di protezione	IP X4
Protezione termica	-
Senso di rotazione	Dx / sx (bisenso)
Albero	Inox AISI 316
Collegamento elettrico	Spina Schuko 16A
Rumorosità (dB)	69
Modalità d'uso	Continua

CONSIGLIO D'USO: Nel caso d'uso con prevalenza verticale, si consiglia di installare una valvola di fondo con relativo filtro all'inizio del tubo di aspirazione per impedire alla pompa di svuotarsi allo spegnimento.
Per pulizia e manutenzione si rimanda a quanto indicato dal costruttore nel libretto di uso e manutenzione in dotazione.

RICAMBI E ACCESSORI

Descrizione	Codice	Q. tà
Kit ingranaggi	980035	1
Kit guarnizioni	979035	1
Kit corpo pompa	974035	1
Kit portagomma dritto Novax	750035	1
Kit portagomma curvo Novax	810035	1
Filtro aspirazione 20mm	004201	1

Descrizione	Codice	Q. tà
Condensatore 12,5 µF	670035	1
Scatola elettrica	130035	1
Interruttore	020035	1
Ventola	290035	1
Copriventola	140035	1
Base antiribaltamento	978035	1
Carrello	190000	1
Kit by-pass	985035	1

NOVAX G-20 0,8HP

TECHNICAL SHEET



Code	971000 I
EAN code	8032706072380
HS code	84137045



SPECIFICATIONS:

Pre-charged pump with inox gears, ideal for transferring viscous, clean, acidic and alkaline liquids, including food-grade liquids, with transfer temperature not exceeding 35°C, even in the presence of air bubbles.


IT IS SUITABLE FOR TRANSFERRING:

Olive and other food-grade oils

PUMP

Flow rate (l/h)	1750
Hose connection (Ø)	20 mm
Fitting thread	3/4" F
Max. temperature	35°C / 95°F
pH	3 : 11
Max. viscosity (CPS)	500
Operating pressure	0,4 bar - 5,8 psi
Max. suction depth	2 mt
Max. discharge length (H0)	4 mt
Shaft seal	NBR
Body pump material	CuZn Low Lead + Novax alloy
Cover material	CuZn Low Lead + Novax alloy
Rotating component	Inox gears
Certificates	CE + Moca

Measures	120x230xh. 190	Net weight (Kg)	5,8
Box	155x290xh. 210	Gross weight (Kg)	6,3

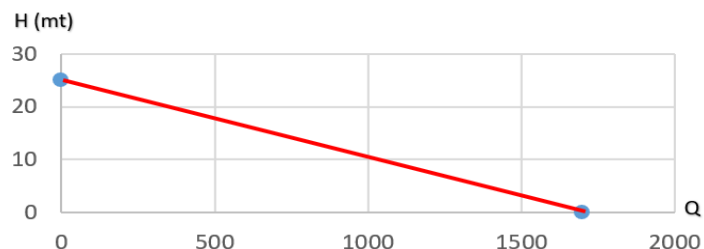

60335-1 / 60335-2 (2008-07), B.T. 2006/95/CEE (2006-12), 73/23 CEE (1973-02), 98/37/CEE (1998-06), 2006/42/CE (2006-05), in 93/68/CEE (1993-07), 2000/14/CE (2000-05), 2014/30/EC (2014-02)

ELECTRIC MOTOR

Voltage (V)	230
Power rating (HP)	0,8
Power rating (kW)	0,56
A	2
Frequency (Hz)	50
Rotation speed (RPM)	2850
Protection	IP X4
Over load protection	-
Direction of rotation	Bi-directional rotation
Main shaft	Inox AISI 316
Electrical connection	Schuko 16A plug
Noise level (dB)	69
Operating mode	Continuous duty

USAGE RECOMMENDATIONS:

For vertical head applications, install a foot valve with strainer on the suction line to prevent pump draining when switched off.
Refer to the manufacturer's operation and maintenance manual for cleaning and servicing.

SPARE PARTS & ACCESSORIES

Description	Code	Pcs
Inox gears kit	980035	1
Seals & gasket kit	979035	1
Pump body kit	974035	1
Right fitting + fly nut (Novax)	750035	1
Bent fitting + fly nut (Novax)	810035	1
Suction filter 20mm	004201	1

Description	Code	Pcs
Capacitor 12,5 µF	670035	1
Electric box	130035	1
Two way switch	020035	1
Fan	290035	1
Fan cover	140035	1
Stabilizer base	978035	1
Trolley	190000	1
By-pass kit	985035	1